



PRESSURE CONTROL



General Description

- For use with fluorinated refrigerants as well as with air and water (allowable Fluid Temp : -10 to 120°C)
- Type HS for Universal application
- Micro-switch ensures reliable switching
- Mounting Bracket supplied as standard
- SPDT contact mechanism.

Pressure Connections

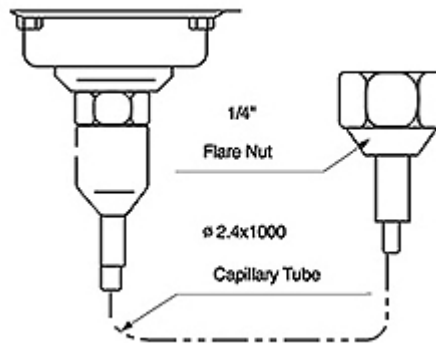

- 1: Common Terminal
- 2: Close on, Pressure Decrease
- 3: Close on, Pressure Increase

Electrical Function

Rated Voltage(V)		Power Factor (COS ϕ)	125/250 V AC
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	12
	Locked Roter	0.45	72

Specification

Model NO.	Range		Differential		Factory Setting		Max. Bellows Pressure (kgf/cm ²)	WT(kg)
	Min	Max	Min	Max	On(Off)	On(off)		
Inductive 203	-50cmHg	3	0.35	2	0.5	1.5	11	0.42

Current	206	-50cmHg	6	0.6	4	2	3	16.5	
	210	1	10	1	3	4	6	16.5	
	220	5	20	3	5	15	12	40	
	230	5	30	3	10	20	15		

Appearance

