




■ **Various wiring**

D-sub connector, flat cable and SI unit are available.

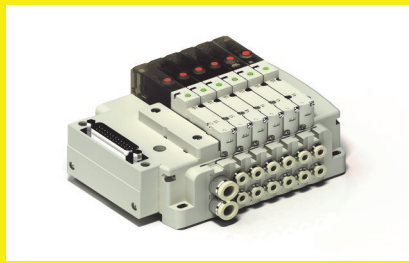

■ **High speed response time**


: less 12ms

■ **Effective section area**

: over 0.22Cv



■ **Easy to change the wiring direction**

It's easy to change the wiring to vertical or horizontal direction.

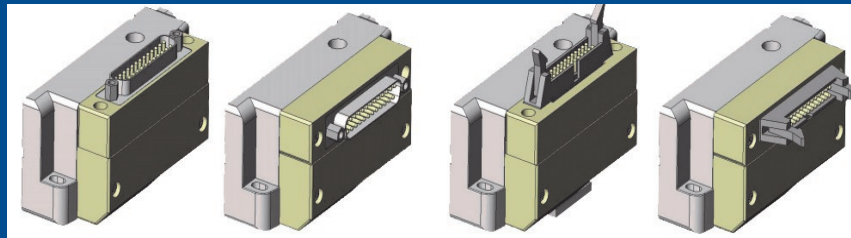

■ **Easy to replace fittings**

Ø3,Ø4,Ø6,Ø8mm, Ø5/32",
Ø 1/4", Ø 5/32", Ø 5/16"
available.

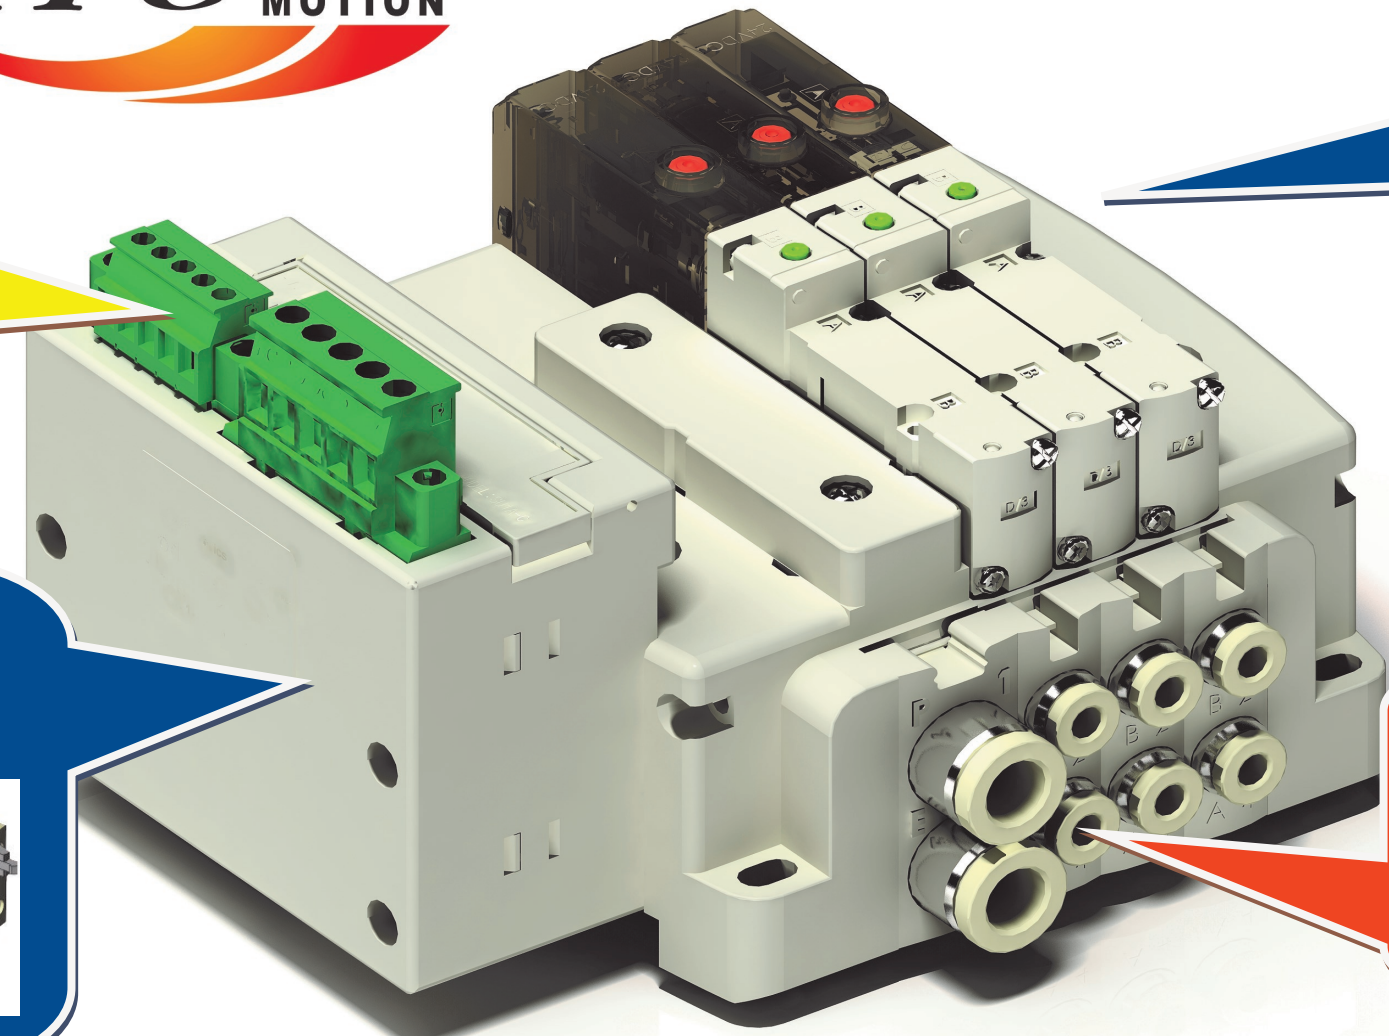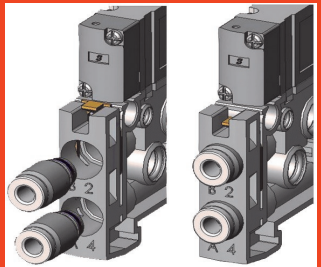

TPC Plug in valve-**RS** series

- ▶ 5 port pilot type solenoid valve
- ▶ Plug-in with various wiring
- ▶ RoHS compliant with Eco-friendly materials