



SN3000. 1/4

NAMUR Interface
Solenoid / Pneumatic Valves


- 5/2, 5/3 -1/4
- 23mm Body Width
- Transition Flow 1000ℓ/min (5bar)




SN3101-IP
2 4
3 1 5




SNP3101
2 4
3 1 5




SN3101-IP-SG2-**
2 4
3 1 5




SNP3200
2 4
3 1 5




SN3101-IP-SD2-**
2 4
3 1 5




SNP3303
2 4
3 1 5



SN3101-IL-SC2-CN2-**
2 4
3 1 5





SN3200-IL-SC2-CN2-**
2 4
3 1 5




SN3303-IL-SC2-CN2-**
2 4
3 1 5

** : Voltage Selection (see page 62)




SPECIFICATION

ITEM	SERIES	SOLENOID, PNEUMATIC	
		FUNCTION	
		5 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²)-5bar		18.0	12.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		30ms or Less	40ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:5.5VA(60Hz) / DC:2.5W	

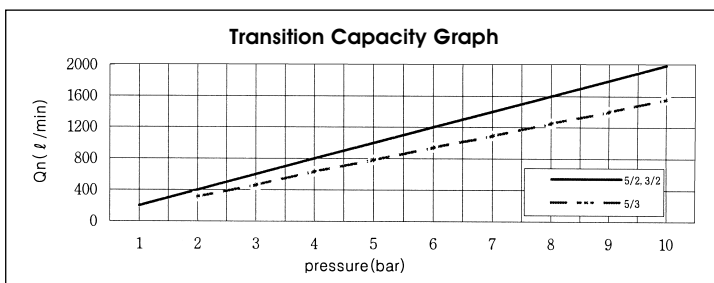

- ### The Material of Parts
- Valve Body : Die-Cast Aluminium
 - Spool : Aluminium
 - Seals : NBR
 - Spring : Stainless
 - Cap : Zinc Pressure Die-Cast
 - Pilot Parts : Glass Filled Nylon
 - Armature : Stainless Steel
 - Armature Seals : Viton


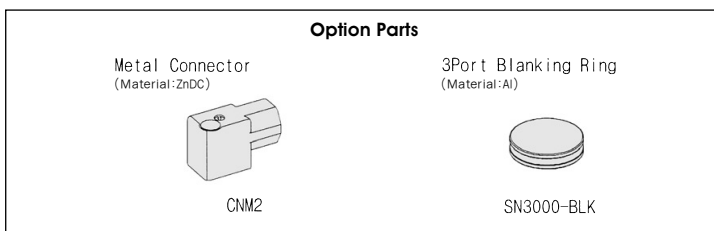


* The specification on each item can be amended without any prenotice to improve a performance.
* The specification on each item can be different from actual specification.

ORDERING NO.

SN3 1 0 1 - I P - SC2 - CN2 - A2


Valve Series	Function	Port Size & Thread	Return Method	Int/Ext. Pilot	Manual Operator	Solenoid Coil Type	Connector Type	Voltage
SN3 : Solenoid Valve	1	5/2 Single	0	G 1/4	0	None	0	None
	2	5/2 Double	1	NPT 1/4	1	Internal Pilot	0	None
	3	5/3 Closed Center			1	Air + Spring	SC2	3 Pin Connector Coil
	4	5/3 Open Center			2	Air	SG2	Grommet/Flying Leads
SNP3 : Pneumatic Valve	5	5/3 Pressure Center			3	Spring	SD2	Grommet/Flying Leads With LED
	0	None					CN2	Normal Connector
	A2	AC 220V					CD2	Connector With LED
	A1	AC 110V					C22	Connector With LED & Surge Suppressor
	A4	AC 24V					C22	Connector With LED & Surge Suppressor
	D4	DC 24V					CNM2	Metal Connector
	D2	DC 12V					CDM2	Metal Connector With LED
							C2M2	Metal Connector With LED & Surge Suppressor




Solenoid & Pilot Actuated Spool Valves

5Port 2Position Solenoid Valve


Single Solenoid
 SN3101-IL-SD2-***

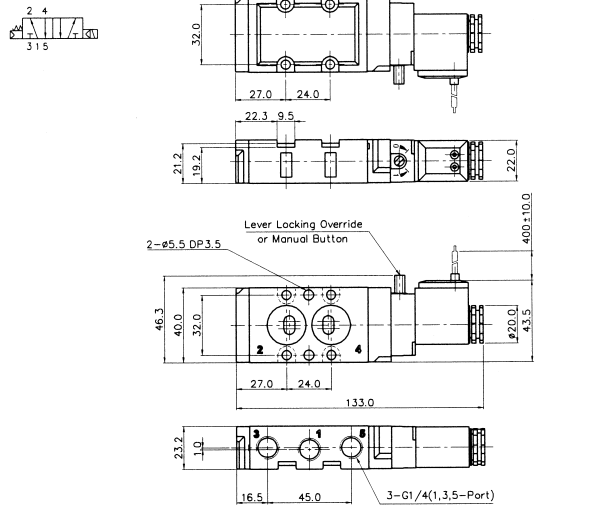

SN3101-IL-SC2-CNM2-***

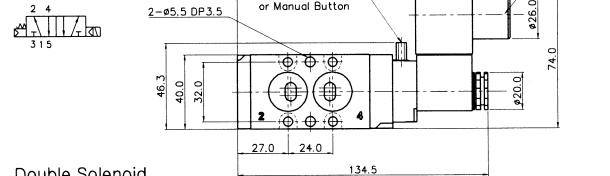


Double Solenoid
 SN3200-IL-SC2-CNM2-***

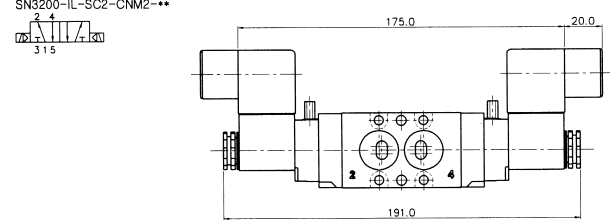


5Port 3Position Solenoid Valve

Closed Center
 SN3303-IL-SC2-CNM2-***

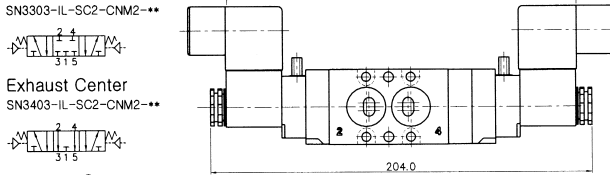

Exhaust Center
 SN3403-IL-SC2-CNM2-***




Pressure Center
 SN3503-IL-SC2-CNM2-***




5Port 2Position Pneumatic Valve

Single Pneumatic
 SNP3101

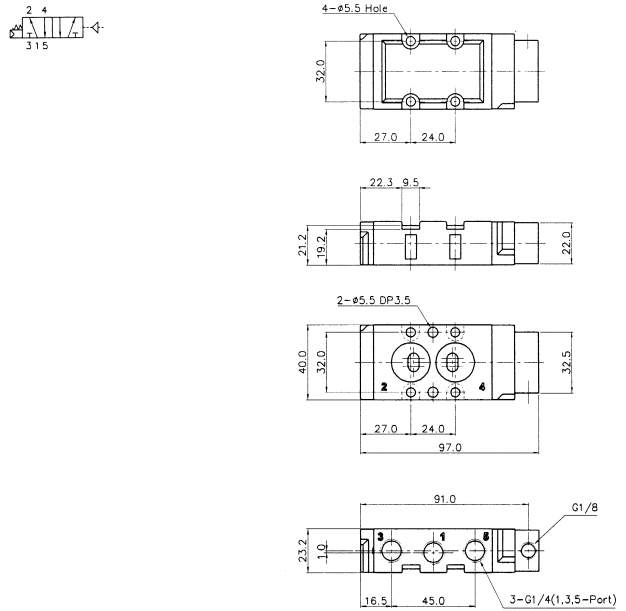

Double Pneumatic
 SNP3200

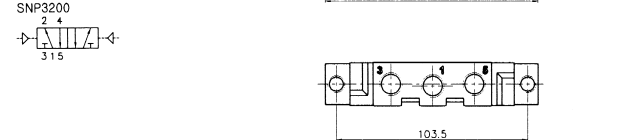


5Port 3Position Pneumatic Valve

Closed Center
 SNP3303




Exhaust Center
 SNP3403



Pressure Center
 SNP3503




Sealing Part Dimension

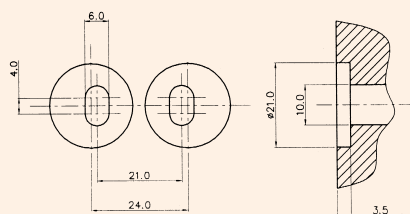


Sealing Area

3-Port Blanking Ring Option (Material : Al)



SN3000-BLK

Metal Connector (Material : Zn-Dc)

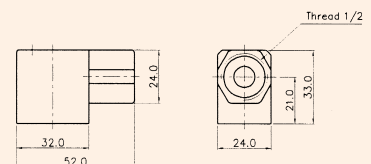

CNM2


SN4000. 1/4

NAMUR Interface
Solenoid / Pneumatic Valves


- 5/2, 5/3-1/4
- 30mm Body Width
- Transition Flow 1800ℓ/min (5bar)

SPECIFICATION

ITEM	SERIES	SOLENOID, PNEUMATIC	
		5 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²)-5bar		32.0	16.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		30ms or Less	40ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:5.5VA(60Hz) / DC:2.5W	

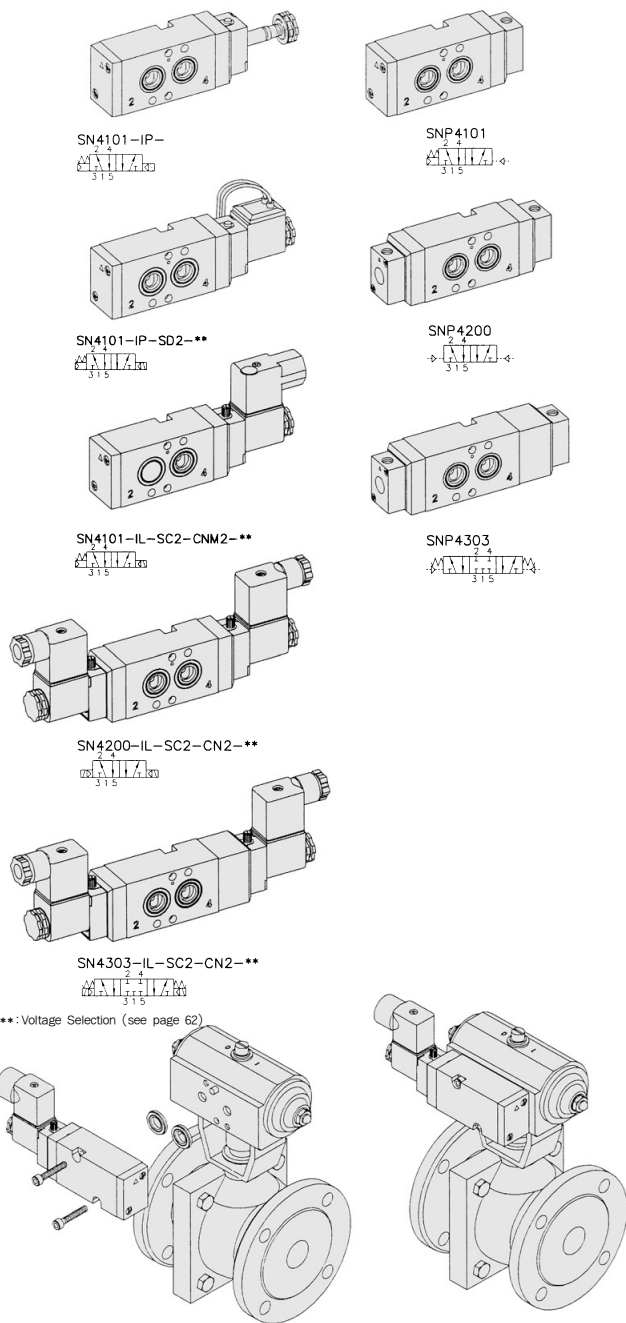

** : Voltage Selection (see page 62)

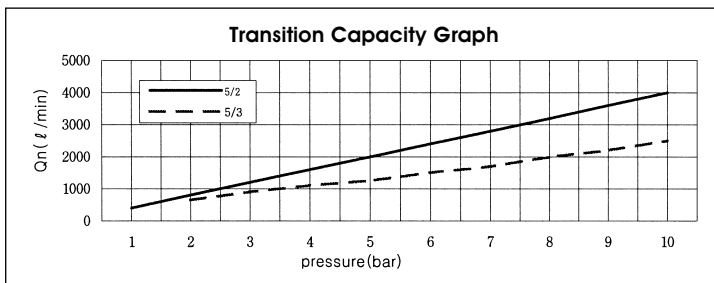

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

Option Parts

Metal Connector
(Material:ZnDC)



CNM2

3Port Blanking Ring
(Material:Al)



SN3000-BLK

* The specification on each item can be amended without any prenotice to improve a performance.
* The specification on each item can be different from actual specification.

ORDERING NO.

SN4 1 0 1 - I P - SC2 - CM2 - A2

Valve Series	Function	Port Size & Thread	Return Method	Int/Ext. Pilot	Manual Operator	Solenoid Coil Type	Connector Type	Voltage
SN4: Solenoid Valve	1 5/2 Single	0 G 1/4	0 None	1 Internal Pilot	0 None	0 None	0 None	0 None
	2 5/2 Double	1 NPT 1/4	1 Air + Spring		P Push	SC2 3 Pin Connector Coil	CN2 Normal Connector	A2 AC 220V
	3 5/3 Closed Center		2 Air		Non-Locking	SG2 Grommet/Flying Leads	CD2 Connector With LED	A1 AC 110V
	4 5/3 Open Center		3 Spring		L Lever Locking	SD2 Grommet/Flying Leads With LED	CZ2 Connector With LED & Surge Suppressor	A4 AC 24V
SNP4: Pneumatic Valve	5 5/3 Pressure Center						CNM2 Metal Connector	D4 DC 24V
							CDM2 Metal Connector With LED	D2 DC 12V
							CZM2 Metal Connector With LED & Surge Suppressor	